




VARIO DOSINGCONTAINER OVERVIEW



OUR PRODUCT OVERVIEW



In the range from 7 m³ to 150 m³ almost everything is possible in small steps. Individual aspects like e.g. given space, kind of substrate, plant size etc. determine which Vario Container meets your requirements. In order to meet your individual requirements we offer a wide variety of models.

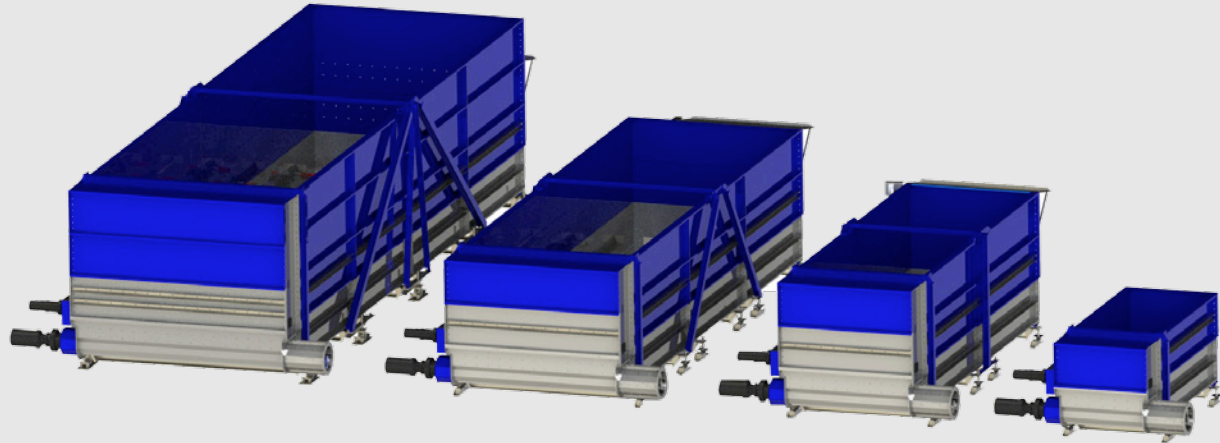

Vario Type	Dimensioning (without drives)			
	Volume	Length	Width	Height
212	7,1m³	4,9m	1,9m	2,0m
213	10,6m³	4,9m	1,9m	2,7m
313	15,9m³	4,9m	2,6m	2,7m
314	21,2m³	4,9m	2,6m	3,4m
323	27,8m³	7,8m	2,6m	2,7m
324	38,2m³	7,8m	2,6m	3,4m
333	41,5m³	10,7m	2,6m	2,7m
334	55,3m³	10,7m	2,6m	3,4m
413	21,2m³	4,9m	3,3m	2,7m
414	28,2m³	4,9m	3,3m	3,4m
423	38,2m³	7,8m	3,3m	2,7m
424	51,0m³	7,8m	3,3m	3,4m
433	55,3m³	10,7m	3,3m	2,7m
434	73,7m³	10,7m	3,3m	3,4m
443	72,3m³	13,6m	3,3m	2,7m
444	96,4m³	13,6m	3,3m	3,4m
523	47,8m³	7,8m	4,0m	2,7m
524	63,7m³	7,8m	4,0m	3,4m
533	69,1m³	10,7m	4,0m	2,7m
534	92,1m³	10,7m	4,0m	3,4m
543	90,4m³	13,6m	4,0m	2,7m
544	120,5m³	13,6m	4,0m	3,4m



VARIO DOSINGCONTAINER
RECYCLING / INDUSTRY



VARIO *DUO*
DOSINGCONTAINER



VARIO GO SEACONTAINER



VARIO *COMPACT*
FOR SMALL APPLICATION



VARIO FLOOR



VARIO MOBILE
EMERGENCY FEEDING / TEST MACHINE




VARIO DRYER



FURTHER CONVEYER
TECHNIQUE



VARIO TRUCK ACCEPTANCE
ALSO FOR SPECIAL SOLUTIONS
WE ARE YOUR RIGHT PARTNER



Terbrack Maschinenbau GmbH
Wesker 30
GERMANY - 48691 Vreden
Tel.: +49 (0) 2564 394487 - 0
Fax: +49 (0) 2564 394487 - 99
Mail: technik@terbrack-maschinenbau.de



TERBRACK
MASCHINENBAU GMBH



THE VARIO DOSINGCONTAINER



FROM 7 m³ TO 150 m³

YOUR PARTNER FOR CONVEYING, DOSING AND FEEDING



www.terbrack-maschinenbau.de


www.terbrack-maschinenbau.de



THE VARIO DOSINGCONTAINER



EQUIPMENT OPTIONS AND ACCESSORIES



STORAGE CONTAINER


The Container is Liquid-tight. Due to the modular design, the Container is extendable at a later point in time.

DISSOLVING AUGER

The special design prevents the Dissolving Auger from getting wrapped with large-fibrous material.

TRANSMISSION & ENGINE

We use planetary transmissions, which guarantee efficient performance and low wear. Also here, a dilution of oil and substrate is prevented by our dual sealing technique, too.

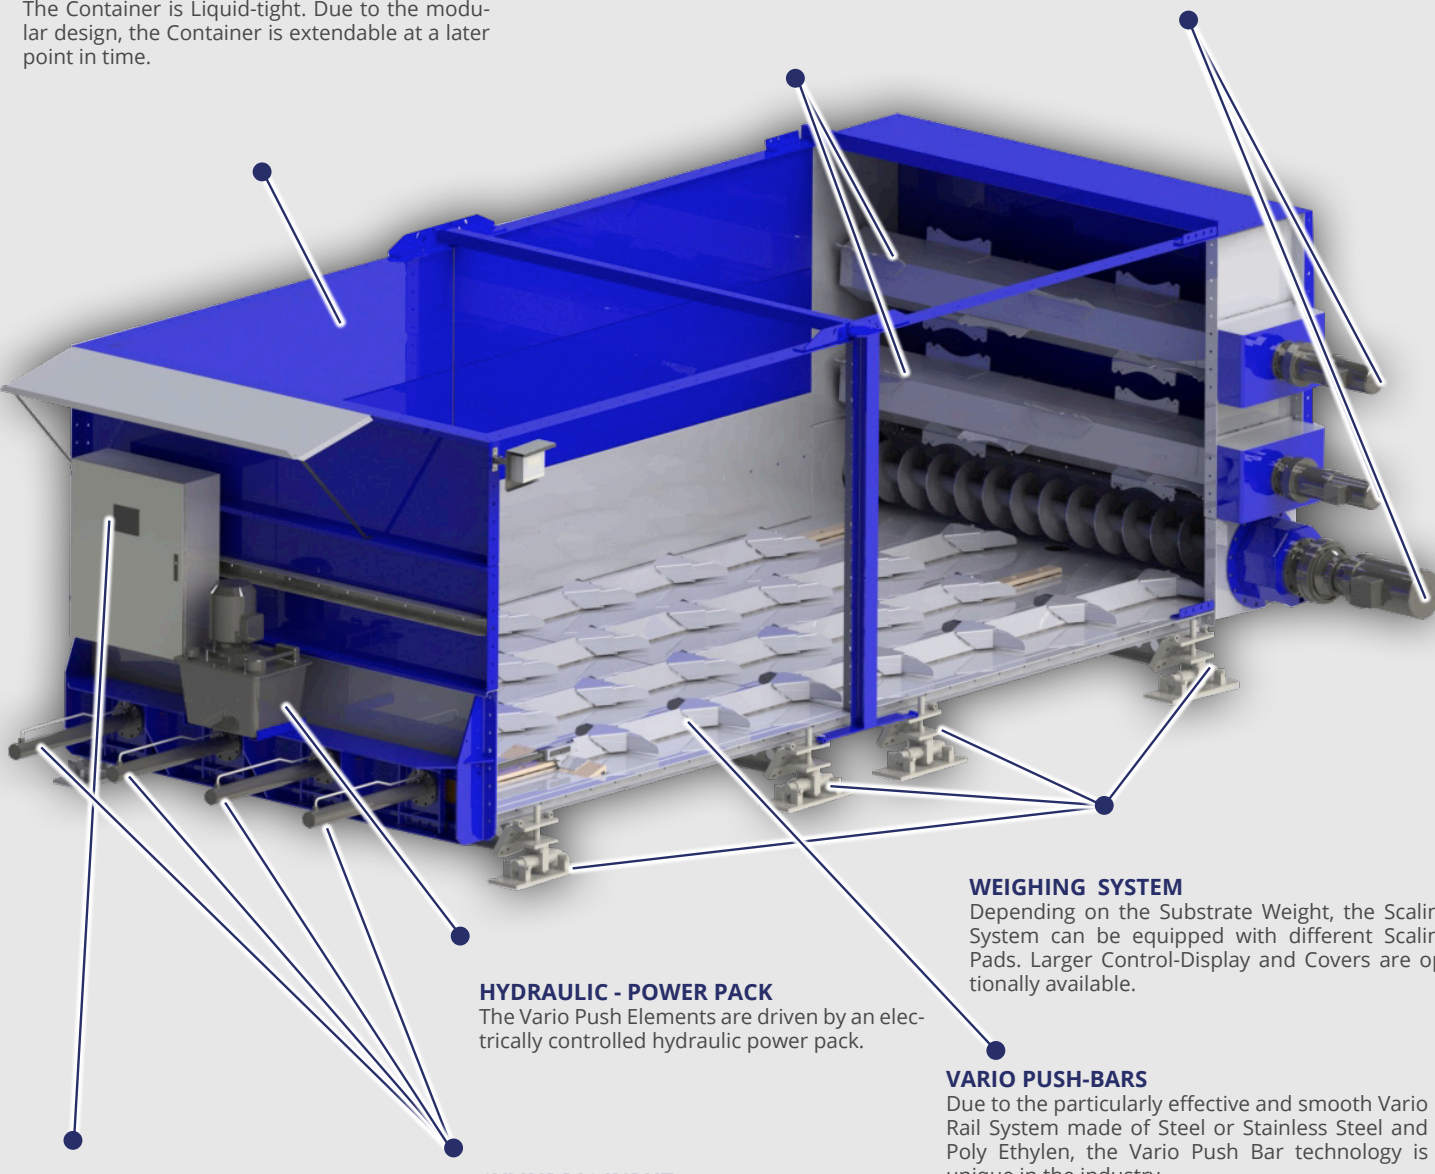

HYDRAULIC - POWER PACK

The Vario Push Elements are driven by an electrically controlled hydraulic power pack.

WEIGHING SYSTEM

Depending on the Substrate Weight, the Scaling System can be equipped with different Scaling Pads. Larger Control-Display and Covers are optionally available.

VARIO PUSH-BARS

Due to the particularly effective and smooth Vario Rail System made of Steel or Stainless Steel and Poly Etylen, the Vario Push Bar technology is unique in the industry.

CYLINDRIC INPUT

Our hydraulic cylinders are equipped with a dualsealed piston rod. Substrate cannot enter the hydraulic system and in return, Oil cannot enter into the substrate.

CONTROLS

The Vario comes standard equipped with a Siemens S7-1200 and can be operated independently. The integration into a new or existing control system is possible.



HYDRAULIC COVER

In order to reduce emissions and bad weather conditions, the Vario Dosingcontainer can be equipped with a hydraulic cover controllable via remote control.

OVERCHARGE PROTECTION

The overcharge protection increases the volume of the Vario Dosingcontainer by approx. 10 %. It prevents loading of substrate over the edge of the container, so the environment of the Vario Dosingcontainers kept much cleaner. (The overload protection can't be combined with a hydraulic lid)



INSPECTION CHAMBER

To facilitate maintenance, we optionally offer an inspection chamber with safety switch on.



WEIGHING SYSTEM

Our weighing system includes an large well readable display. In combination with the Vario control -system we ensure accurate dosing of the substrate. The weighing system can be extended with a component selection via remote control .

The weighing legs can also be protected by covers. Optionally, all values can be forwarded via Profinet or Profibus to a superordinate control unit.



SPECIAL PAINT

The standard color for the steel parts on the Vario is moss green (RAL 6005). The standard color for the stainless steel parts on the Vario is gray (RAL 9006).



ADDITIONAL COMPONENTS

- Vario in partial stainless steel
- Vario in full stainless steel
- Vario in steel (for non-corrosive substrate)
- Vario with underframe
- Discharge direction left, right or center
- Grass & Muck Package 70% and 100%
- Remote access module
- Load-dependent control
- Interconnection with all common and popular downstream systems possible



OVERVIEW OUR ADVANTAGES

- Low energy consumption
- Unique Vario push element system
- Liquid-tight
- Trouble-free dosing of a wide variety of substrates, even long-fibered
- Modular, extendable
- Interconnection with all common and popular downstream systems possible
- Customer care from start to finish
- Worldwide assembly, maintenance and service
- Customer service 365 days a year
- Highest quality „Made in Germany“

FOR DIFFICULT AND LONG-FIBROUS SUBSTRATES „GRASS AND MUCK KIT 70 % AND 100 %“

In the standard configuration, the Vario Duo Dosingcontainer can reliably process up to 40% Grass and Muck. By adding additional components, you can increase the Grass and Muck Feed in two steps, to 70 % and all the way up to 100 %. These additional components can also be added at a later stage to the Vario.